
Senninger Super Spray®

SPRAYS



- Wide variety of color-coded deflector pads to customize distribution pattern.
- Full 360° spray pattern.
- Low-pressure operation: 6-25 psi.
- Chemigation pads available:
 Corn with 58° upward throw and
 Cotton with 15° 30° multi-level upward
 throw.
- Hose barb adapter available for direct furrow water application.

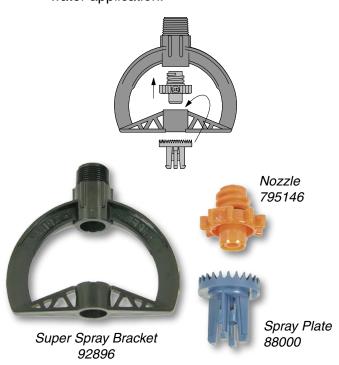

Complete Super Sprays

Includes nozzle; specify desired size.

NI Part #	Description	
92825	Complete Super Spray	
	w/ Plate* and Nozzle	


* There are over 20 spray plates available for the super spray that suit a variety of applications.

Super Spray Options

Hose drag adapters are also available as follows:

NI Part	#	Description
110141		1/2" Drag Hose Adapter
11087		3/4" Drag Hose Adapter

The drag hose adapter and a drag sock allows water application directly into the furrow. The adapter snaps right into the Super Spray, replacing the deflector pad.



Super Spray Components

İ	NI Part #	Description
Ī	92896	Bracket w/ White Vain
	795146	Nozzle
	88000	Spray Plate*

^{*} There are over 20 spray plates available for the Super Spray that suit a variety of applications.