


CABLE

Submersible Pump Cable

Flat THHN PVC Submersible Pump Cable


- 600 volt submersible pump cable with THHN/THWN insulated conductors and PVC jacket.
- Insulation is rated 90° C dry and 75° C wet.
- Standard put ups of 500 and 1,000 ft.

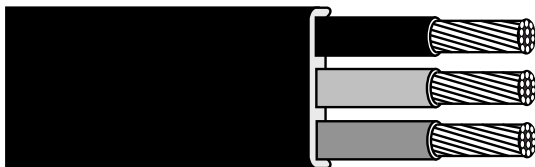

Plain		w/ Ground		Size	Stranding
NI Part #	Wt/M ft	NI Part #	Wt/M ft		
25072	95#	25065	138#	12/3	STR
25073	138#	25067	210#	10/3	STR
25074	269#	25068	360#	8/3	STR
25075	387#	25069	487#	6/3	STR
25076	591#	25070	721#	4/3	STR
25077	875#	25071	1061#	2/3	STR
Call	1394#	25061	1657#	1-0/3	STR
Call	1701#	25063	1998#	2-0/3	STR
Call	2172#	25041	2424#	3-0/3	STR
Call	2567#	25042	2992#	4-0/3	STR
25052	3104#	Call	3530#	250 MCM	STR
25053	4192#	Call	4550#	350 MCM	STR

Twisted PVC Type TW Submersible Pump Cable

- In either 2 conductors or 3 conductors, with or without ground, twisted.
- Rated at 600 volts at copper operating temperatures of -25° C to +75° C.
- Standard put ups of 500 and 1000 feet.

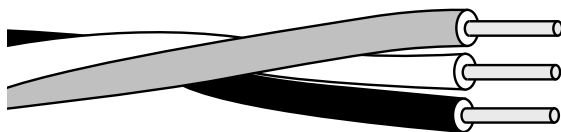

Plain		w/ Ground		Size	Stranding
NI Part #	Wt/M ft	NI Part #	Wt/M ft		
25081	69#	25064	95#	14/3	Solid
25043	46#	25078	69#	14/2	Solid
25082	96#	25031	132#	12/3	Solid
25085	64#	25032	96#	12/2	Solid
25083	137#	25033	185#	10/3	Solid
25044	91#	25034	137#	10/2	Solid
25084	198#	25035	262#	8/3	7 STR
25045	132#	25046	198#	8/2	7 STR
25047	328#	25036	402#	6/3	7 STR
25055	516#	25037	491#	4/3	7 STR

Ground Wire Submersible Pump Cable

- Standard lengths of 500 ft. & 1000 ft.

PVC Ground Wire – Type TW

NI Part #	Size	Wt/M ft	Stranding
25017	14	19#	Solid
25018	12	36#	Solid
25019	10	48#	Solid



Rubber Ground Wire – Type CPE

NI Part #	Size	Wt/M ft	Stranding
25023	14	41#	Solid
25024	12	50#	Solid
25025	10	66#	Solid
25020	8	90#	STR
25021	6	120#	STR
25022	4	170#	STR

Other types, styles, and lengths are available on request.