


SPRAYS

Senninger i-Wob®

Complete i-Wobs

Includes Nozzle & Base; excludes weight.

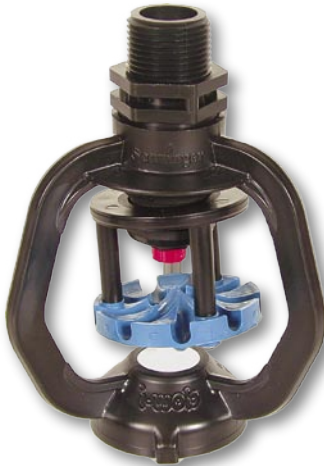

i-Wob, Complete, w/ M NPT Base



i-Wob, Complete, w/ Barb Base

NI Part Number		Description
w/ 3/4" M NPT Base	w/ 3/4" Barb Base	
928127	928127-B	i-Wob, Standard Angle, 9-Groove, Black Deflector, w/ Nozzle
928128	928128-B	i-Wob, Low Angle, 9-Groove, Blue Deflector, w/ Nozzle
928125	928125-B	i-Wob, Low Angle, 6-Groove, White Deflector, w/ Nozzle





Note: i-Wob weight supplied separately, see weights listings below.

- Unique off-center rotary action provides outstanding uniformity.
- Gentle, rain-like application.
- Excellent distance of throw.
- Low pressure operation, between 10 and 20 psi, can mean big energy savings over the course of a year.

i-Wob Components

Note: Complete i-wob consists of Adapter, Nozzle, and Bracket Assembly.

NI Part #	Description
110132	Adapter, 3/4" M NPT Base
110133	Adapter, 3/4" Hose Barb Base
79600	Nozzle (all sizes)
928146	Bracket Assembly, Standard Angle, 9-Groove, Black Deflector
928147	Bracket Assembly, Low Angle, 9-Groove, Blue Deflector
928149	Bracket Assembly, Low Angle, 6-Groove, White Deflector

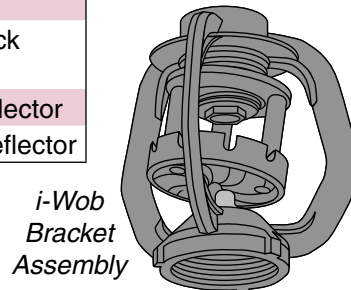

i-Wob Weights

NI Part #	Description
510100	1/2 lb. i-Wob Weight
510101	3/4 lb. i-Wob Weight
510102	1 lb. i-Wob Weight



i-Wob Weight
Below-the-nozzle mounting creates less stress on flexible drops.

i-Wob Options

NI Part #	Description
79580	Nozzle Carrier (nozzle sold separately)
110134	Drag Hose Adapter

Drag Hose Adapter
Allows for easy conversion to direct furrow (LEPA style) application with drag hose.

Nozzle Carrier
Simplifies renozzling for a second flow rate during the season.

Consult NI customer service when considering an i-Wob sprinkler package.