

PUMPS

Berkeley P.T.O. Driven Centrifugal Pumps
Trailer Mounted


Model	Size ***	Capacity gpm	Inlet Outlet	PSI	Volute Connection
T1-B2ERHH	2 x 3 x 10 HH	100 - 400	3" x 2"	112 - 78	NPT
T1-B3ZRM	3 x 4 x 9 M	300 - 700	4" x 3"	86 - 26	NPT
T1-B6ZRM	6 x 8 x 9 M	800 - 2200	6" x 6"	26 - 6	Flange Kit Needed
T2-B3ERBL*	3 x 4 x 10 BL	300 - 600	4" x 3"	130 - 50	NPT
T2-B3JRMBM	3 x 4 x 13 BM	300 - 700	4" x 3"	108 - 70	NPT
T2-B4JRMBH	4 x 5 x 13 BH	600 - 1200	5" x 4"	97 - 35	Flanged
T2-B6JRMBM	6 x 8 x 13 BM	1100 - 1600	8" x 6"	63 - 22	Flanged
T2-B8GRMBM	8 x 10 x 12 BM	1500 - 3000	10" x 8"	29 - 15	Flanged
T2A-B3ERBL*	3 x 4 x 10 BL	300 - 600	4" x 3"	195 - 123	NPT
T2A-B4ERBM*	4 x 5 x 10 BL	600 - 1100	5" x 4"	123 - 67	Flanged
T2A-B4JRMBH	4 x 5 x 13 BH	600 - 1300	5" x 4"	104 - 84	Flanged
T2A-B4EYRMBM**	4 x 5 x 18 BM	400 - 800	5" x 4"	158 - 117	Flanged
T2A-B6JRMBM	6 x 8 x 13 BM	1200 - 1800	8" x 6"	82 - 52	Flanged
T2A-B8GRMBM	8 x 10 x 12 BM	1500 - 3250	10" x 8"	48 - 26	Flanged

*Handy primer, priming check valve, and flanges sold separately.
See pages 118 and 128.*

* Available only in 1000 RPM P.T.O. configuration.

** Available only in 540 RPM P.T.O. configuration.

*** Discharge x Suction x Impeller Diameter

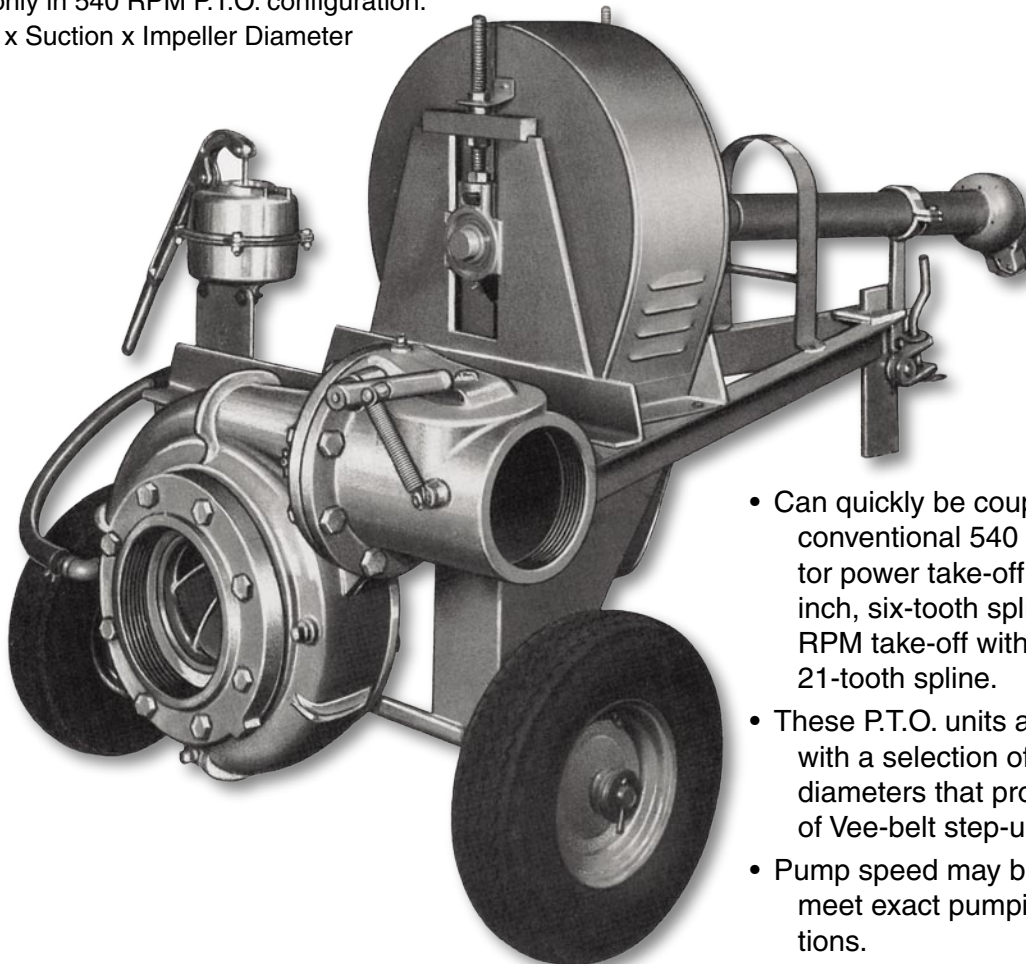

- Can quickly be coupled to any conventional 540 RPM tractor power take-off with a 1 3/8 inch, six-tooth spline, or 1000 RPM take-off with a 1 3/8 inch, 21-tooth spline.
- These P.T.O. units are available with a selection of sheave diameters that provide a range of Vee-belt step-up drive ratios.
- Pump speed may be varied to meet exact pumping conditions.

G