


UNDERGROUND PIPE

- Powder coated or galvanized for maximum resistance to abrasion, corrosion, impact, and extreme temperature changes
- Designed for underground installation.
- Resists frost and corrosion.
- Gasket included.

“T” Double Coupler

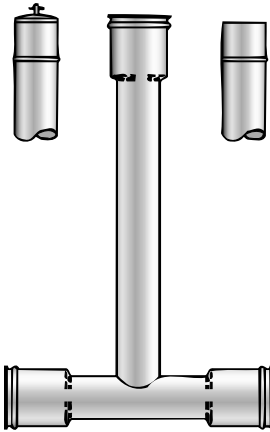


“T” may be ordered with a choice of three different ends:
 — valve stub
 — female top
 — male ring lock

24" double female bottom

Standard Options						
“T” Double Coupler with 24" Double Female Bottom						
Size	Bottom Dia.	Riser Dia.	Riser Height	Riser Options		
PIP IPS	4" x 4"	4"		female top	valve stub top	male ring lock top
	6" x 6"	4"	30"			
		6"	36"			
	8" x 8"	4"	42"			
		6"	60"			
	10" x 10"	4"	60"			
		6"				

“Cactus Jack” Double Coupler with Options

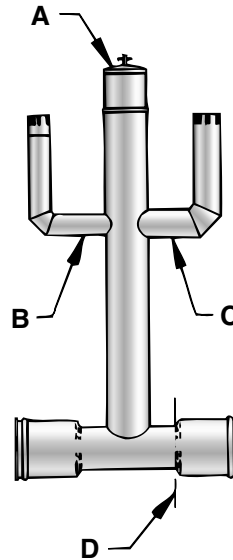

Options:
 A: riser valve
 B: air relief valve
 C: pressure relief valve
 D: capped for end plug

Standard Sizes		
“Cactus Jack” Double Coupler with Options		
Riser Height	Riser Size	Arm Size
30"	4", 6", 8"	2" MIPT or FIPT
36"	4", 6", 8"	3" MIPT or FIPT
42"	4", 6", 8"	4" MIPT
60"	6", 8"	4" FIPT

G

RELIEF VALVES

Pressure Relief Valves

Factory set; specify setting.



966270

NI Part #	Size
966237	2"
966269	2-1/2"
96667	3"
966270	4"

Air Relief & Vacuum Relief Valves

Cast Aluminum

Factory set; specify setting.



97001

NI Part #	Size
97006	1-1/2" FNPT
97001	2" FNPT
97002	3" FNPT